Jofemar
VENDING

BLUETEC
TOUCH

BLUETEC TOUCH

VANDAL-PROOF LOCK

OPTIMISED CAPACITY AND VOLUME

CAN BE CONFIGURED DEPENDING ON NEEDS

TOUCH SCREEN

INCREASE BRAND EXPOSURE

BLUETEC TOUCH

Interactivity and elegance for your business.

The **Bluetec Touch** has been developed to connect your brand with the customers through unique and **interactive experiences,** guaranteeing a service of added value and differential in locals. It combines the latest generation of interactivity technologies with the traditional qualities of the range Bluetec, as maximum capacity, or an **elegant and functional design**. As a novelty, the **number of selections is customizable**, depending on the needs of the machine and customer specifications.

FEATURES

- Vertical column loading system to speed up loading.
- Independent detection of sold out products by channel.
- Continuous performance self-testing.
- Remote age control.

TOUCH SCREEN

- 17" (1280x1024) Touch Screen.
- Without labels and push buttons: selection by pressing the image on the screen.
- Number of selections customizable depending on the needs and specifications of the machine. 21, 32, 40 y 60 selecciones.
- Optimum brand exposure.
- Recovery buttons and coins are displayed on the touch screen.
- Configuration of images product independently by selection. Uploading images, audiovisual and promotional content via USB or via J-SUITE.

STRUCTURE

- 1.5mm-thick steel-plate cabinet treated against corrosion and rust.
- Front in smudge-proof stainless steel and tempered glass.
- Energy-saving LEDs lighting.
- Internal vandal-proof lock and three anchor points.
- Cash box with lock and optional auto-locking during extraction.

CREDIT MANAGEMENT

- Innovative Jofemar coin mechanism with five refund tubes for five different coin values.
- Anti-fraud coin validator with parameter analysis, such as diameter, metal composition or magnetic property.
- Jofemar banknote reader.
- Different types of stacker available.
- MDB protocol.
- Maximum safety.
- A standard refund tube and up to 4 by removing one channel. (Except for model 31 that does not need to be removed).

PROGRAMMING

- General on site programming of all the machine functions.
- Optionally, it can be programmed with the EasyFlash hand terminal. Database creation and stock control and accounting.
- Connection with J-SUITE telemetry software through a 3G modem.
- Dynamic programming that allows grouping up keys and channels in different setups.
- DEX protocol data extraction (optional).

OPTIONS

- Telemetry through J-SUITE. Price and working mode remote programming; alerts when the product is sold out.
- BT - 11 375.
- BT - 11 500.
- Additional return tubes.
- Possibility of payment systems with credit card.
- Dispensing of different pack sizes.

jSUITE

Also ... with J-SUITE you will have an integral and unified solution for the management of your tobacco machines that favors the profitability of your business.

BLUETEC MODEL	21	21/29	31	31/39
Selections	Configurable			
Complete/split channels	21	13/16	31	23/16
Capacity (packages)	881	835	1.193	1.147
Size (mm)	1.700 x 800 x 446		1.700 x 800 x 596	
Weight (kg)	164,85	173,25	208,42	214,2
Estimated energy consumption	70W	70W	70W	70W

TEMPERED GLASS

SMUDGE-PROOF STAINLESS STEEL

CAPACITY DIAGRAM

BLUETEC 21 • BLUETEC 21/29

Top view with channel numbering

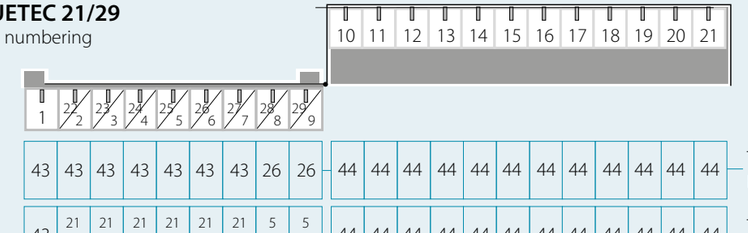

Individual capacity per channel

43	43	43	43	43	43	43	26	26	44	44	44	44	44	44	44	44	44	44	44	44	44	Total capacity BLUETEC 21: **881**
43	21/16	21/16	21/16	21/16	21/16	21/16	5/16	5/16	44	44	44	44	44	44	44	44	44	44	44	44	44	Total capacity BLUETEC 21/29: **835**

BLUETEC 31 • BLUETEC 31/39

Top view with channel numbering

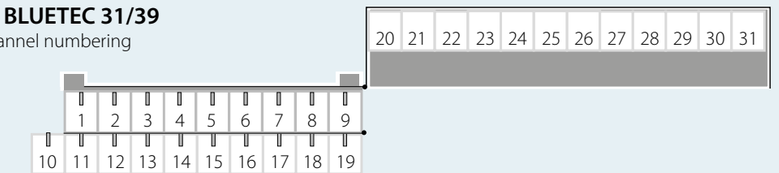

Individual capacity per channel

43	43	43	43	43	43	43	26	26	40	40	40	40	40	40	40	40	40	40	40	40	40	Total capacity BLUETEC 31: **1.193**
36	36	36	36	36	36	36	36	36	36													

Top view with channel numbering

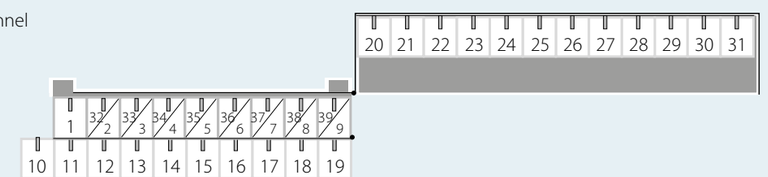

Individual capacity per channel

43	21/16	21/16	21/16	21/16	21/16	21/16	5/16	5/16	40	40	40	40	40	40	40	40	40	40	40	40	40	Total capacity BLUETEC 31/39: **1.147**
36	36	36	36	36	36	36	36	36	36													

Jofemar
VENDING

Technological
Innovation

Reliability

100% Jofemar
Technology

Jofemar
Ctra. Marcilla km 2
31350 PERALTA. Navarra SPAIN
Tel. +34 948 75 12 12
Fax +34 948 75 04 20
www.jofemarvending.com

VE-CT192EN01 R00
12/18